





SAFETY CHUCK 22-30 TYPE VT




FLO 22-30
WITHOUT SHAFT




FLW 22-30
WITH SHAFT


SAFETY CHUCK 22-30 TYPE C




FLO 22-30
WITHOUT SHAFT




FLW 22-30
WITH SHAFT




VT 2





VT 1




C



A

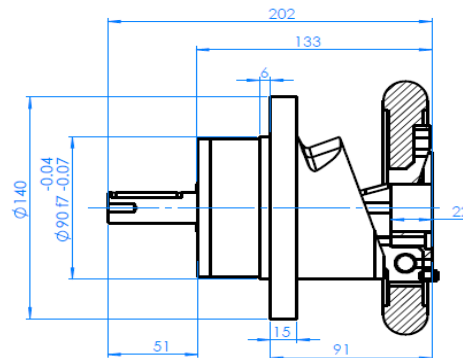


VIEW A






SAFETY CHUCK 30-40 TYPE VT


SAFETY CHUCK 30-40 TYPE C




FLO 30-40
WITHOUT SHAFT




FLW 30-40
WITH SHAFT




FLO 30-40
WITHOUT SHAFT




FLW 30-40
WITH SHAFT






VT 2



VT 1




C

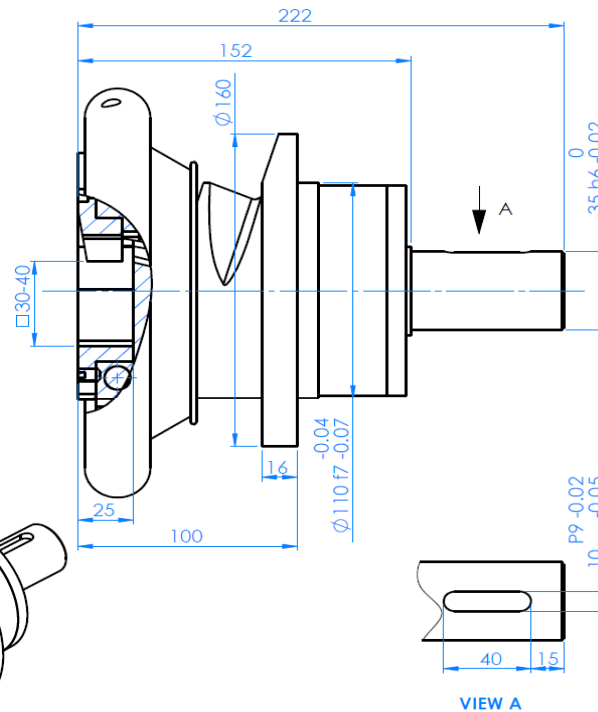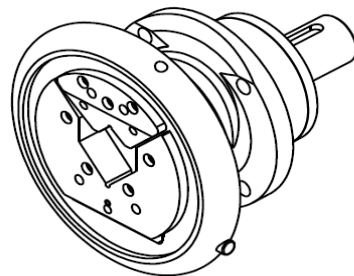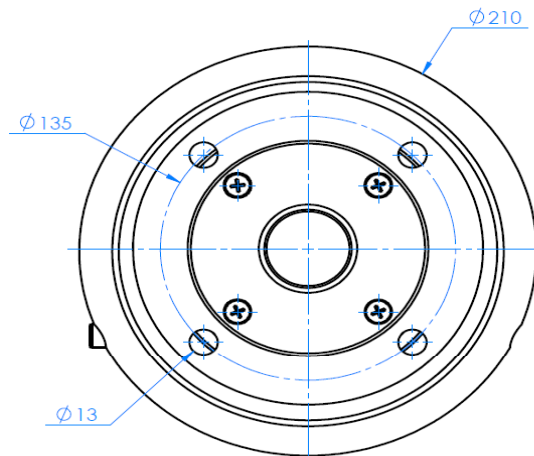




SAFETY CHUCK 40-50 TYPE VT




FLO 40-50
WITHOUT SHAFT




FLW 40-50
WITH SHAFT


SAFETY CHUCK 40-50 TYPE C




FLO 40-50
WITHOUT SHAFT




FLW 40-50
WITH SHAFT






VT 2







VT 1




C

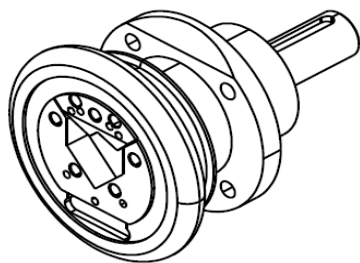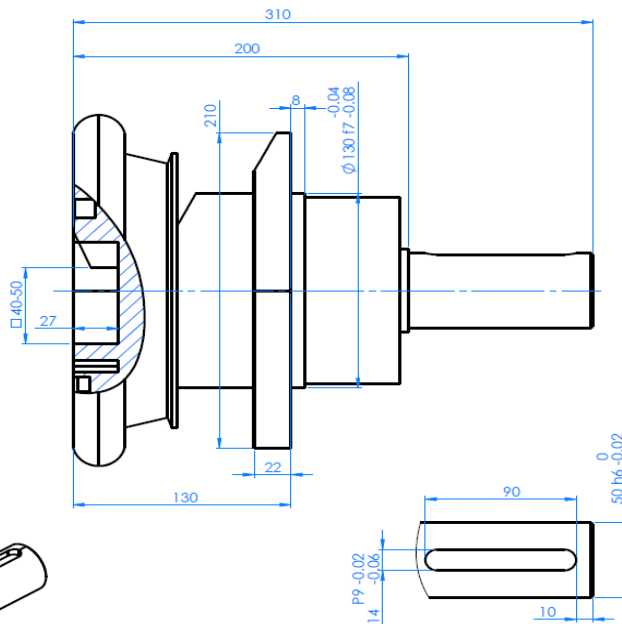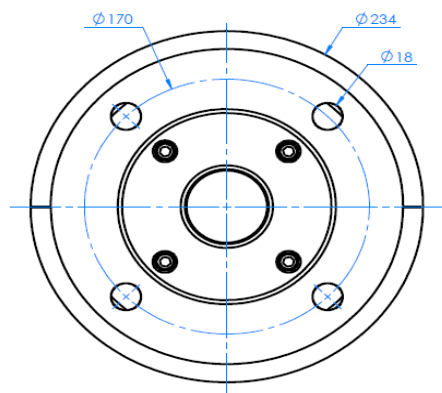

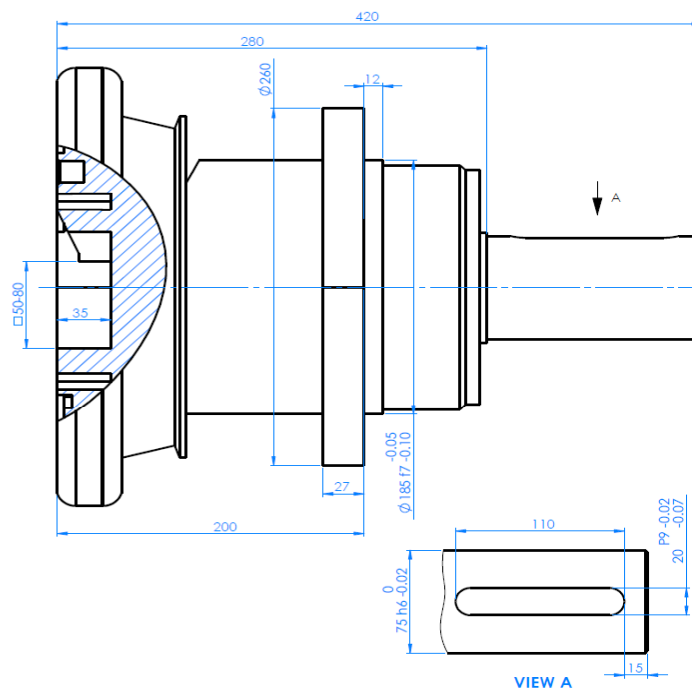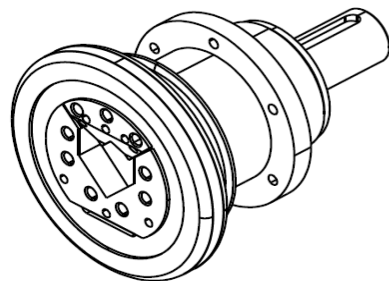




SAFETY CHUCK 22-30 TYPE VT




FLO 22-30
WITHOUT SHAFT




FLW 22-30
WITH SHAFT


SAFETY CHUCK 22-30 TYPE C




FLO 22-30
WITHOUT SHAFT




FLW 22-30
WITH SHAFT




VT 2





VT 1




C




A

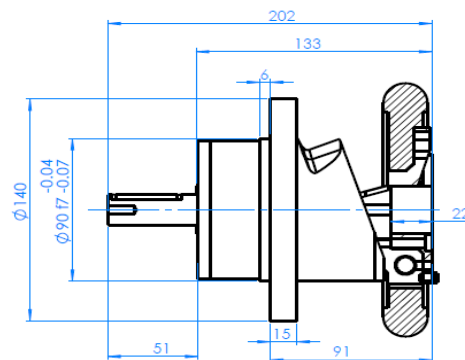

VIEW A




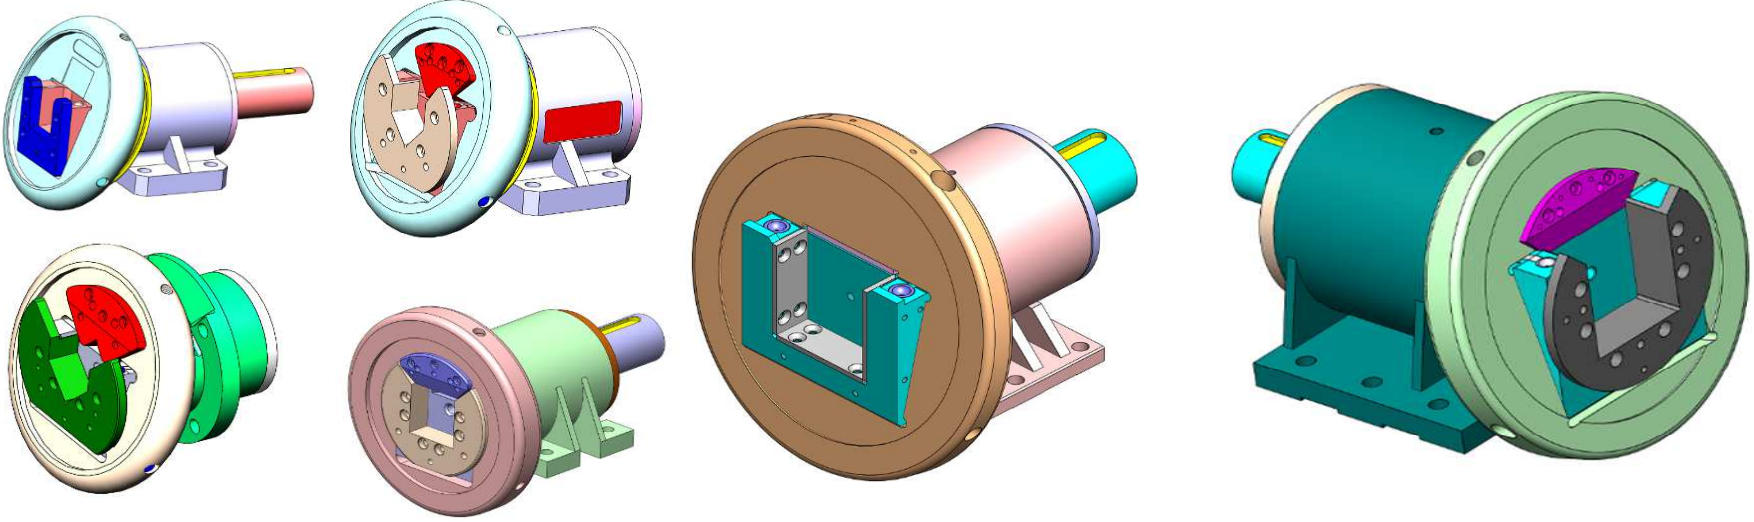Safety chucks	 WWW.FSR.CO.IR		FARTAK SANAT		
MODEL	max. beam weight / kg	max.torque / NM	Square bar /mm	Type C	Type VT
19-25	400	120	19-25	✓	
22-30	800	180	22-30	✓	✓
30-40	1600	350	30-40	✓	✓
40-50	2800	1100	40-50	✓	✓
50-80	7000	2350	50-80		✓
80-120	12000	10000	80-120		✓
120-180	22000	20000	120-180		✓
					




SAFETY CHUCK 22-30 TYPE VT


SAFETY CHUCK 22-30 TYPE C




STO 22-30
WITHOUT SHAFT




STW 22-30
WITH SHAFT




STO 22-30
WITHOUT SHAFT




STW 22-30
WITH SHAFT







VT 2




VT 1




C

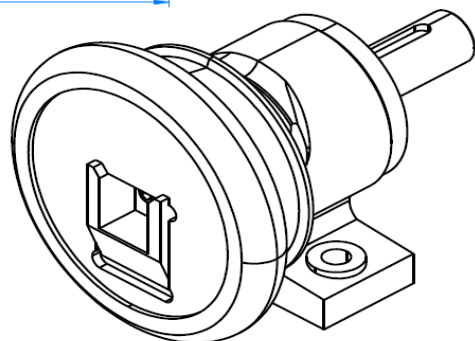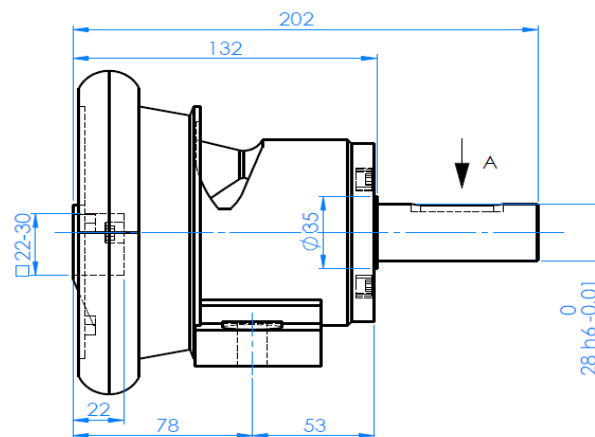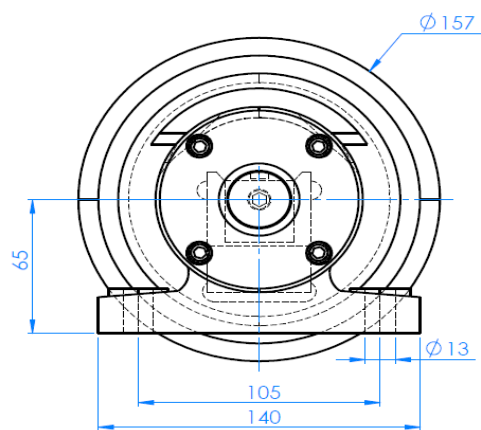



SAFETY CHUCK 30-40 TYPE VT




STO 30-40
WITHOUT SHAFT




STW 30-40
WITH SHAFT

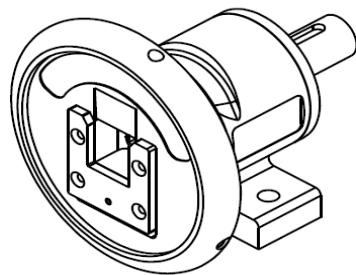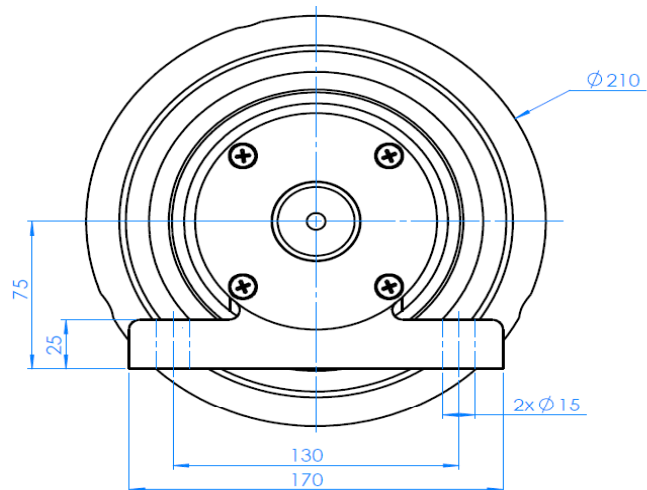



SAFETY CHUCK 30-40 TYPE C




STO 30-40
WITHOUT SHAFT




STW 30-40
WITH SHAFT

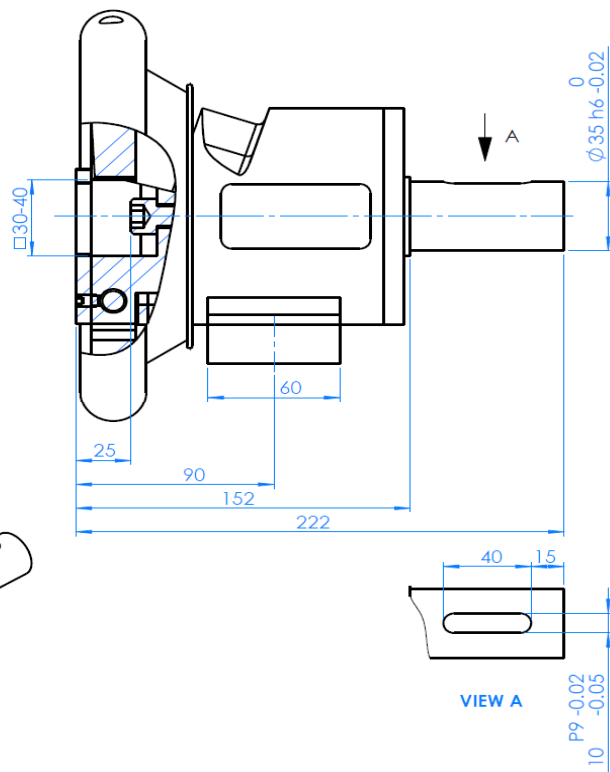

VT 2




VT 1




C



SAFETY CHUCK 40-50 TYPE VT




STO 40-50
WITHOUT SHAFT




STW 40-50
WITH SHAFT


SAFETY CHUCK 40-50 TYPE C




STO 40-50
WITHOUT SHAFT




STW 40-50
WITH SHAFT






VT 2



VT 1




C

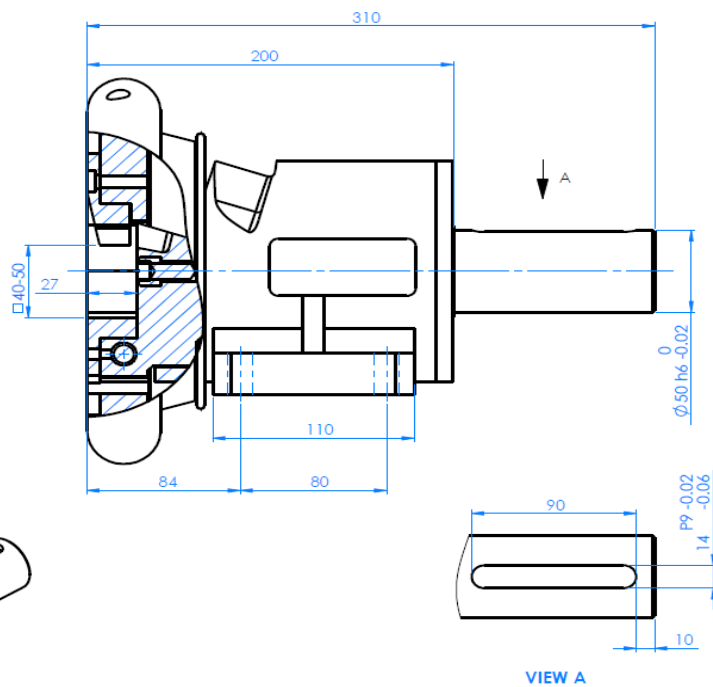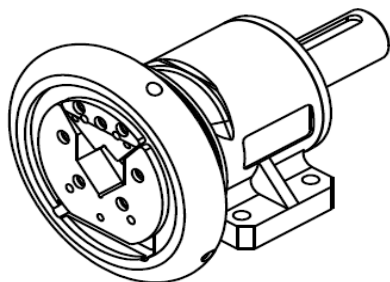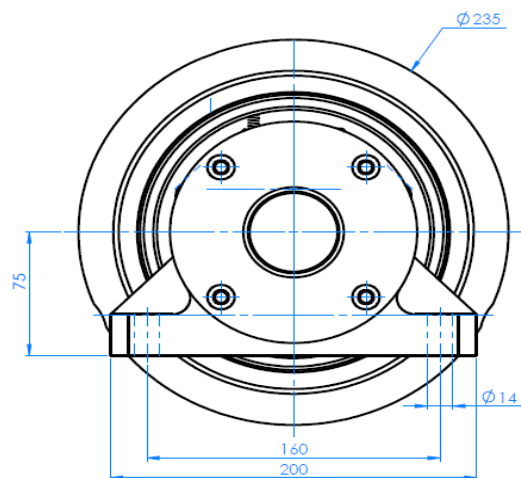









SAFETY CHUCK 50-80 TYPE VT

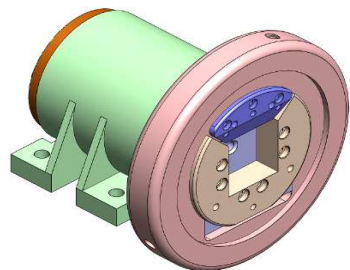


STO 40-50
WITHOUT SHAFT

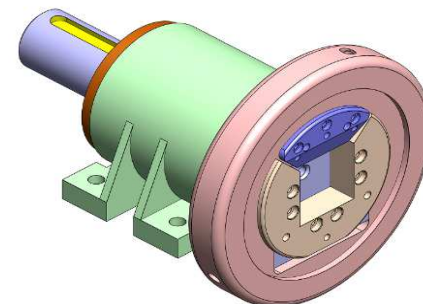

STW 40-50
WITH SHAFT

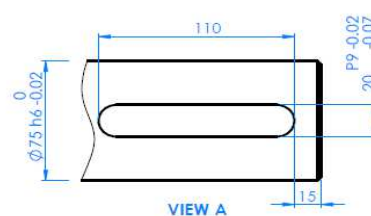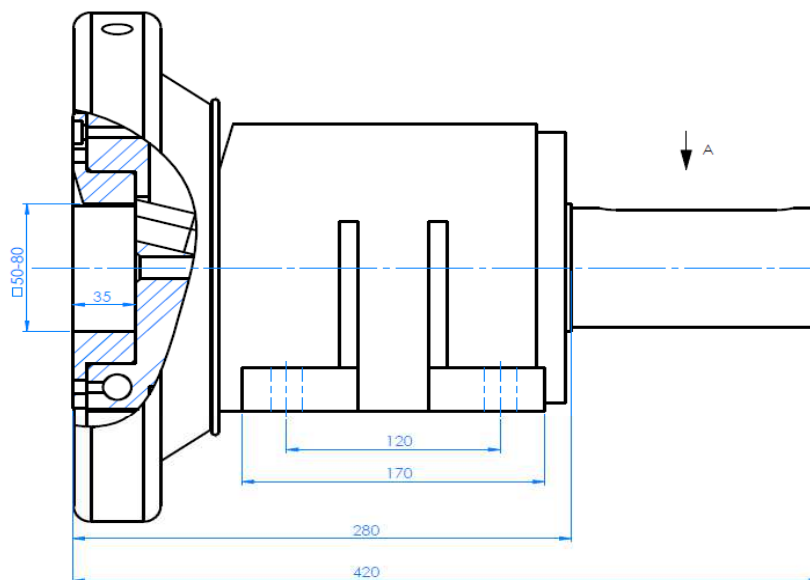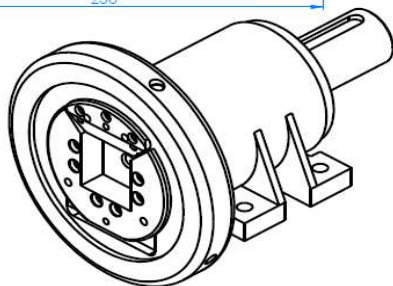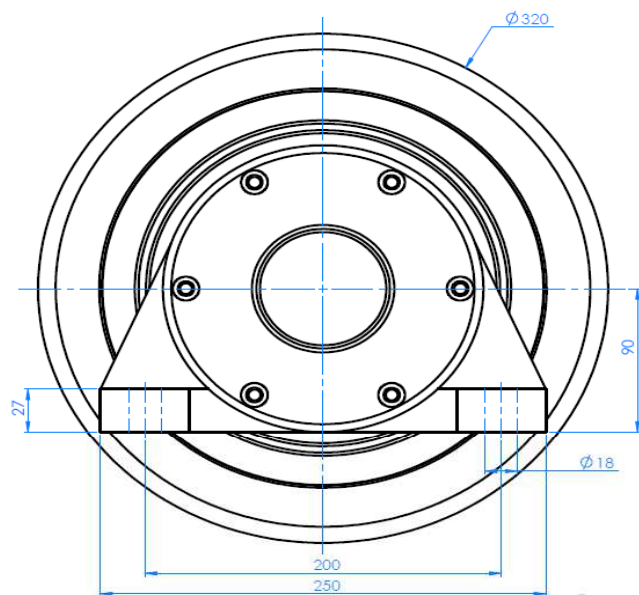


VT 2




VT 1






SAFETY CHUCK 80-120 TYPE VT



STO 80-120
WITHOUT SHAFT




STW 80-120
WITH SHAFT

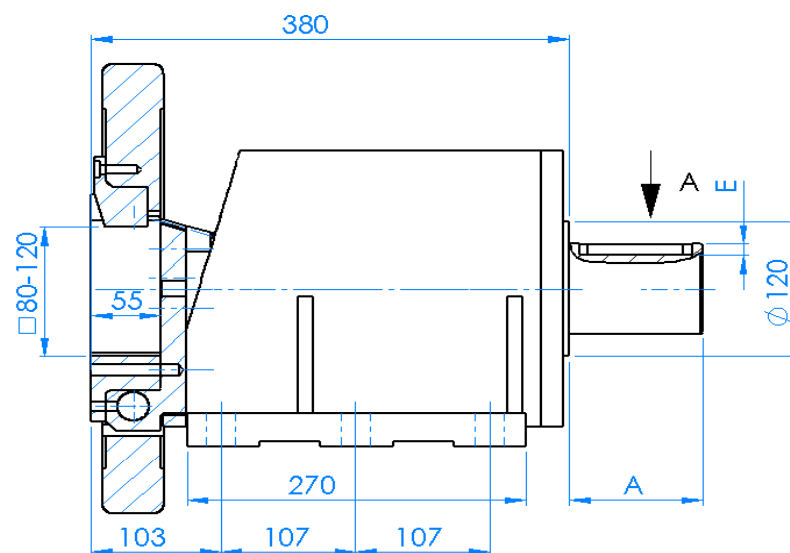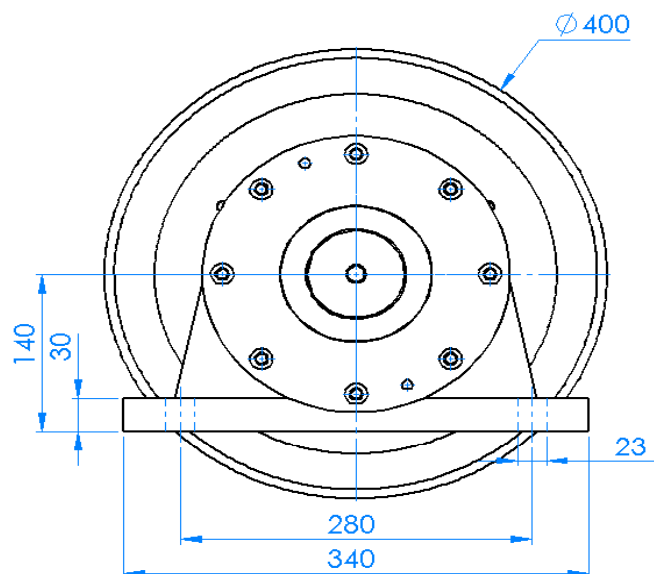


VT 1


A		mm
B		mm
C		mm
D		mm
E		mm
F		mm




VIEW A

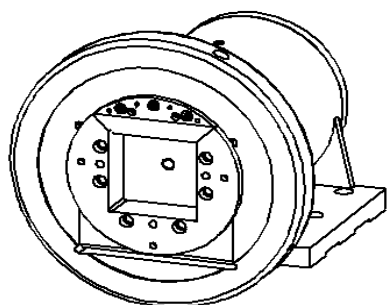

SAFETY CHUCK 120-180 with wear plates



STO 80-120
WITHOUT SHAFT

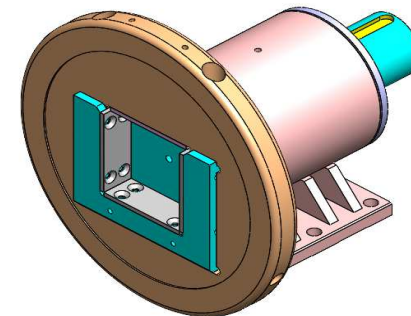

STW 80-120
WITH SHAFT

